

Small in its dimensions, but not in its performance













# The evolution of #thisisfimap in its smallest form

The small dimensions are balanced by the carefully studied spaces, which ensure exceptional comfort during work. Its design facilitates every movement, while intelligent technology makes using the functions so user-friendly that it seems natural.

It is the product of an extraordinary study that has enabled the same features and options present on larger models to be integrated in such a small model, creating a scrubbing machine that is a little powerhouse.



# It has a design that redefines space

The dimensions are compact like those of a walk-behind scrubbing machine, and yet the seat space is surprisingly comfortable, adapting to the operator and guaranteeing visibility and safety during any maneuver and even in tight spaces.



The polyethylene structure leaves no part exposed and protects all the components inside.





The squeegee and the support are made from aluminum, a material that increases reliability over time and offers resistance to impacts, making the machine suitable for use in any environment.



ECO mode

#### INTEGRATED VIDEO TUTORIALS

With BMg you can save the time dedicated to training: when the operator needs instructions, he or she can watch the tutorials directly on the display of the machine.



ECO MODE

BMg can be used at any time, even in sensitive environments, with the Eco Mode function that enables the machine to work guietly

The optional access reach, stored in spe to not interfere wit machine and to res

The optional accessories are always within reach, stored in special compartments designed to not interfere with the design of the machine and to respect its dimensions.



without causing disturbance.


## YELLOW COLOR-CODED PARTS

At the end of the cleaning operation, the yellow color reminds the operator of the parts to be cleaned immediately, to maintain constant performance over time.



## **SPRAY GUN**

It facilitates maintenance at the end of the operation, and is useful for rinsing the tanks when there is no faucet nearby.

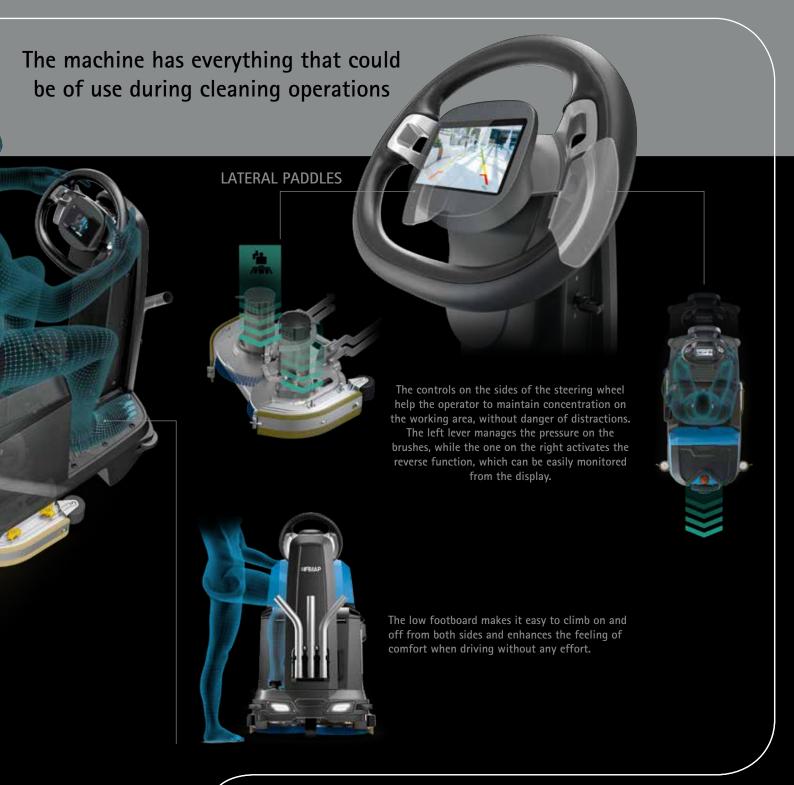



# Pure power to your commands




## **POWER MODE**

With any active working program, the Power Mode function enables the scrubbing power to be increased for a short time interval, and when this has passed, the machine returns to the previous configuration. This is useful when during the normal cleaning routine, the machine comes across small areas of dirt meet that need a more intense scrubbing action.



## **REAR VIEW CAMERA**

In addition to monitoring reverse maneuvers, the operator can activate the camera at any time, to monitor cleaning performance without turning around.

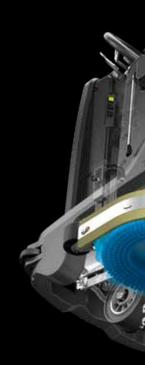



## **VACUUM WAND**

Equipped with a powerful 3-stage vacuum motor, the wand enables the collection of dirt deposited in areas difficult to be reached with the machine. In cases of stubborn dirt, it can be dampened with the spray gun.



## FLR-FIMAP LONG RANGE





### **REDUCES DOWNTIMES**

The 4 km/h working speed guarantees fast cleaning operations, while when in transfer, the machine saves time because it moves at over 5 km/h, and it is not necessary to get off when changing rooms, going through doors or getting into an elevator.



## DRIES EVEN IN NARROW BENDS

The V-shaped side splash guards keep the water inside the brush area and in line with the path of the squeegee, which can then collect it completely. This enables excellent drying quality to be achieved, without leaving traces of water and with no need to pass over an area twice, even when the turning circle is limited.





# All the help possible for safe operations

### Safety is paramount

The BMg is equipped with a host of safety systems and features to keep the operator in complete control at all times, working with total peace of mind

## **ACTIVE TECHNOLOGIES to prevent accidents**



Increases the safety of reverse maneuvers





Enhances visibility in dim light

TOUCH SCREEN DISPLAY



STEERING WHEEL CONTROLS

The steering wheel controls offer the operator even greater control when cleaning, and also improve safety by eliminating distractions and letting the operator keep his or her eyes on the zone ahead of the machine



CRUISE CONTROL

Control device letting the operator set the required speed



ANTI-COLLISION SYSTEM

The anti-collision system detects obstacles when reversing



DESCENT CONTROL Maintains a constant speed when driving downhill, and prevents sudden increases in speed caused by gravity



ESC -ELECTRONIC STABILITY CONTROL Automatically reduces speed when steering without the operator using the brake



STOP&G0

The traction control system, which brakes and holds the machine when the accelerator pedal is released, provides assistance for both uphill and downhill gradients



ELECTROBRAKE

It is automatically operated when the machine stops. It works as a safety parking brake



Front and rear LED headlights maximize work safety in all conditions

FRONT HEADLIGHTS
Position lights - Driving lights

REAR HEADLIGHTS
Position lights - Reverse lights



VIDEO TUTORIALS

Any questions? BMg has all the answers: the video tutorials help the operator in every phase of the job

## PASSIVE SYSTEMS to help the operator in case of emergency





Reduces time to service in case of emergency. The red button sends an SMS alert to receive prompt help, reducing downtimes

SOS DEVICE



By pressing a single button the machine stops immediately

EMERGENCY STOP



## iD-intelligent Drive



TOUCH SCREEN



LOG-IN WITH PASSWORE



ZONE PROGRAMS



CRUISE CONTROL



SUSTAINABLE CLEANING



SEVERE CLEANING



REAR VIEW CAMERA



ANTI-COLLISION SYSTEM



VIDEO

# It is so user-friendly that it is a pleasure to operate



With the iD - intelligent Drive system, the operator interacts with the machine in a completely new way.

The management through the display enables a more precise use of the functions, as the graphic provides the information in a clear and simple manner.

This also improves the professionalism and quality of the cleaning operation.



LOG-IN WITH PASSWORD To protect your investment



ZONE PROGRAMS
For all the performance you'll ever need



ECO MODE

To protect the environment



POWER MODE

For maximum power when you need it



REAR VIEW CAMERA
To keep everything under control



VIDEO TUTORIALS

For a more efficient,
fast and easy operator training



# **EXPERIENCE CONNECTIVITY**







Watch the video

Developing new technology to improve efficiency is one of the core missions of Fimap.

An example of this is FFM, the Fimap Fleet Management system which collects the data sent by the machines and transforms it into valuable information accessible to you easily in real time, 24/7, from your smartphone, through the app My.Machine.

Being constantly connected to your machines will help you operate them even more efficiently and effectively.

My.Machine lets you know where the machines are, if the operation is being carried out according to plans and at the scheduled time.

The machine's health status is constantly monitored. In the very unlikely event of a breakdown, you'll receive an alert notification directly on your smartphone, allowing you to take action promptly and immediately call the technical support.

You can check the battery conditions and the quality of the charges in order to optimize battery endurance and life cycle.

Keep tabs on your machines remotely when you want and from wherever you want!








USAGE INFORMATION



HEALTH STATUS





ENVIRONMENTAL IMPACT

You know where your machines are

You know how your machines are used

You can check the machine consumption per intervention




# BMg reduces the environmental impact of cleaning operations

Fimap has developed a series of solutions that act on the consumption of water, detergent and energy, to get the most out of the resources used and avoid waste. These technologies increase the efficiency of operations, respect the environment and reduce the cost of cleaning per sq.m.





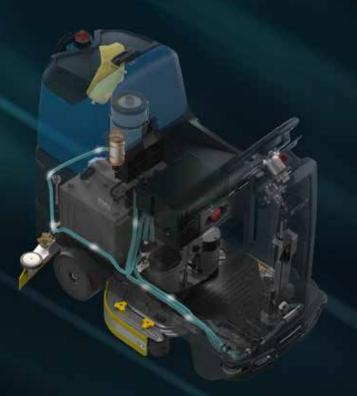





#### FLR-FIMAP LONG RANGE

Reduces water and detergent consumption per cleaning operation by up to 66%\*. This is a system which recycles detergent solution to increase autonomy: to scrub more sq.m. while using less resources



#### **FSS-FIMAP SOLUTION SAVER**

Water and detergent quantities are separately dosed, reducing consumption by up to 50%



#### **FWF-FIMAP WATER FLOW**

Ensures uniform cleaning results across the entire working width on the first pass, optimizing detergent solution consumption

#### **ENERGY**



#### FES-FIMAP ENERGY SAVER

Reduces energy consumption by up to 35%

#### LED TECHNOLOGY

Up to 80% lower energy consumption than conventional headlights.

The LED headlights consume much less energy than conventional headlights, offer a longer lifespan and illuminate with a brilliant white light similar to natural daylight

\*Saving calculated on a triple recycling cycle



# Every sector has its own requirements, BMg can satisfy them all!



## **BMg DISC**

The brush head with disc brushes is the most versatile option, as this can adapt to all types of hard floors, both smooth and irregular, in any environment.

The force of the two brushes easily removes even stubborn dirt.





With flexible equipment options, you can configure it in the most convenient and beneficial way for you

Touch-screen display



## **OPTIONALS AND ACCESSORIES**

#### **OPTIONALS**









Vacuum wand





Spray gun



FFM-FIMAP FLEET MANAGEMENT




Front and rear driving LED headlights

**FSS-FIMAP SOLUTION SAVER** 

On-board Battery Charger

FLR-FIMAP LONG RANGE

## **ACCESSORIES**



Different types of PPL disc brushes are available, with thickness varying from 0.3 to 0.9. These offer the perfect solution for dealing with any type of dirt on any floor

Abrasive brushes:

Ideal for heavy duty cleaning on industrial surfaces



Pads BLACK

Superior abrasiveness for rapid and thorough heavy duty cleaning GREEN

Ideal for removing dirt from more delicate floors (rubber or linoleum)

Ideal for scrubbing delicate or treated floors, and achieving an instant shine



Rear squeegee rubber blades
33 SHORE (PARA)
For maintenance cleaning of smooth floors
40 SHORE (PARA)
For stubborn dirt on floors with joints
POLYURETHANE
For heavy duty cleaning on industrial floors,
even with wide gaps



\* The devices cannot be installed together

# OPTIONAL AND STANDARD EQUIPMENT


- NOT AVAILABLE

o UPON REQUEST


	SINGI	SINGLE DISC DUAL DISC		DISC	ORBITAL	
USER EXPERIENCE	56 B Pro	56 B Plus	65 B Pro	65 B Plus	Orbital Pro	Orbital Plus
iD-Intelligent Drive:	-	•	-	•	-	•
- 5 inch high resolution color touch screen	-	•	-	•	-	•
- Log-in with password	-	•	-	•	-	•
- Zone programs	•	•	•	•	•	•
- Cruise control	•	•	•	•	•	•
- Eco Mode	•	•	•	•	•	•
- Power Mode	-	•	-	•	-	•
- Rear view camera	-	•	-	•	-	•
- Anti-collision system	-	•	-	•	-	•
- Video tutorials	-	•	-	•	-	•
Membrane control panel	•	-	•	-	•	-
COMFORT			ı	ı	ı	
COMFORT	•	•	•	•	•	•
Hour meter  Cleaning solution level indicator	•	•	•	•	•	•
	<u> </u>	•	•	•	_	•
Fresh water empty tank light	0	0	0	0	0	0
Battery charger  Automatic brush coupling/uncoupling	•	•	_	_	_	0
Brush and squeegee actuator	•	•	-	-	-	•
Vacuum wand with 3 stage motor	0	0	0	0	0	0
Spray gun	0	0	0	0	0	0
Noiseless suction	•	-	•	_	•	-
Noiscless suction						
PRODUCTIVITY						
Water flow selector	•	•	•	•	•	•
Triple pressure selector	-	•	-	•	-	•
Double pressure	•	-	•	-	•	-
Vacuum speed selector	-	•	-	•	-	•
FFM (Fimap Fleet Management) with SOS device	0	0	0	0	0	0
Squeegee and squeegee support in aluminum	•	•	•	•	•	•
Side splash guards	-	-	•	•	-	-
SAFETY	T					
Blinking light	•	•	•	•	•	•
Driving LED headlights (front - rear)	0	•	0	•	0	•
Ramp up	•	•	•	•	•	•
Stop&Go	•	•	•	•	•	•
Descent control	•	•	•	•	•	•
ESC (Electronic Stability Control)	•	•	•	•	•	•
Emergency Stop	•	•	•	•	•	•
ENVIRONMENT						
FSS (Fimap Solution Saver)*	0	0	0	0	0	0
FSS (Fimap Solution Saver)* and spray gun	0	0	0	0	0	0
FLR (Fimap Long Range)*	0	0	0	0	0	0
FLR (Fimap Long Range)* and spray gun	0	0	0	0	0	0
FES (Fimap Energy Saver)	•	•	•	•	•	•
FWF (Fimap Water Flow)	-	-	•	•	-	-
Start&Stop	•	•	•	•	•	•

• STANDARD

# **DIMENSIONS AND TECHNICAL DATA**







Productivity theoretical   up to sqm/h   2240   2600   2000   2040	TECHNICAL DATA – BMg		SINGLE DISC	DUAL DISC	ORBITAL		
Scrubbling System			56 B Pro 56 B Plus	65 B Pro 65 B Plus	Orbital Pro Orbital Plus		
Scrubbling System	Productivity theoretical	un to sam/h	2240	2600	2040		
SCRUBBING SYSTEM							
Working width				1000			
Brush motors         (no,) V/W         (1) 24/500         (1) 24/680           Brush mpm         rpm         140         -           Oscillations         n/min         -         2000           Pressure on the brushes (min max)         kg         30±50         40±60           TANKS AND RECOVERY SYSTEM           Solution tank         1         53         -           Recovery tank         1         55         -           Vacuum motor         V/W         24/422         -           Vacuum water lift         mbar         101         -							
Brush rpm							
Oscillations		(no.) V/W	, ,		(1) 24/680		
Pressure on the brushes (min. – max)   kg   30+50   40+60	Brush rpm		14	-			
TANKS AND RECOVERY SYSTEM   Solution tank   1   53			-				
Solution tank   1	Pressure on the brushes (min max)	kg	30÷50	30÷50 40-			
Recovery tank	TANKS AND RECOVERY SYSTEM						
Vacuum motor         V/W         24/422           Vacuum water lift         mbar         101           3-stage vacuum motor (for vacuum wand)         V/W         24/680           Vacuum water lift (3-stage motor)         mbar         166           Detergent tank capacity (FSS)         1         3           BATTERIES           Supply!traction         V         24/aut.           Battery run time*         Up to h         2,6         2,5         2,9           PROPELLING SYSTEM           Forward working speed         km/h         4         4           Transport speed         km/h         5,6         5           Gradeability during transport empty         %         10         1           Traction motor         V/W         (1) 24/300         24/300           SPECIFICATIONS           Machine dimensions (l x h x a)         mm         1189         1189         1189           Machine weight empty without batteries         kg         165         173         172         Machine weight empty without batteries         kg         243         251         250         GVW (Gross Vehicle Weight)         kg         382         390 <th< td=""><td>Solution tank</td><td></td><td colspan="4">53</td></th<>	Solution tank		53				
Vacuum water lift	Recovery tank	I	55				
3-stage vacuum motor (for vacuum wand)	Vacuum motor	V/W	24/422				
Vacuum water lift (3-stage motor)         mbar         166           Detergent tank capacity (FSS)         I         3           BATTERIES           Supply/traction         V         24/aut.           Batteries         (no.) V/Ah CS         (2) 12/105 GEL           Battery run time*         up to h         2,6         2,5         2,9           PROPELLING SYSTEM           Forward working speed         km/h         4         4         4         Transport speed         m/h         5,6         Gradeability during transport empty         96         10         10         10         10         124/300         10         124/300         128/5         128/5         128/5         128/5         128/5         128/5         128/5         118/9	Vacuum water lift	mbar					
Detergent tank capacity (FSS)   I   3   3	3-stage vacuum motor (for vacuum wand)	V/W	24/680				
BATTERIES   Supply traction   V	Vacuum water lift (3-stage motor)	mbar					
Supply/traction   V	Detergent tank capacity (FSS)	I	3				
Supply/traction   V	RATTERIES						
Batteries		V	24/aut				
Battery run time*	Зарруунасной						
Battery run time*         up to h         2,6         2,5         2,9           PROPELLING SYSTEM           Forward working speed         km/h         4           Transport speed         km/h         5,6           Gradeability during transport empty         %         10           Traction motor         V/W         (1) 24/300           SPECIFICATIONS           Machine dimensions (l x h x a)         mm         1285         1285         1285           Machine dimensions (l x h x a)         mm         1189         1189         1189         1189           Squeegee width         mm         785           Machine weight empty without batteries         kg         165         173         172           Machine weight empty with batteries         kg         243         251         250           GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70	Batteries	(no.) V/Ah C5					
Forward working speed         km/h         4           Transport speed         km/h         5,6           Gradeability during transport empty         %         10           Traction motor         V/W         (1) 24/300           SPECIFICATIONS           Machine dimensions (l x h x a)         mm         1285         1285         1285           Machine dimensions (l x h x a)         mm         1189         1189         1189           Squeegee width         mm         785           Machine weight empty without batteries         kg         165         173         172           Machine weight empty with batteries         kg         243         251         250           GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70	Battery run time*	up to h	2,6	2,9			
Forward working speed         km/h         4           Transport speed         km/h         5,6           Gradeability during transport empty         %         10           Traction motor         V/W         (1) 24/300           SPECIFICATIONS           Machine dimensions (l x h x a)         mm         1285         1285         1285           Machine dimensions (l x h x a)         mm         1189         1189         1189           Squeegee width         mm         785           Machine weight empty without batteries         kg         165         173         172           Machine weight empty with batteries         kg         243         251         250           GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70	PROPELLING SYSTEM						
Iransport speed         km/h         5,6           Gradeability during transport empty         %         10           Traction motor         V/W         (1) 24/300           SPECIFICATIONS           Machine dimensions (l x h x a)         mm         1285         1285         1285           Machine dimensions (l x h x a)         mm         1189         1189         1189         1189           Squeegee width         mm         785           Machine weight empty without batteries         kg         165         173         172           Machine weight empty with batteries         kg         243         251         250           GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70		km/h	4				
Gradeability during transport empty         %         10           Traction motor         V/W         (1) 24/300           SPECIFICATIONS           Machine dimensions (l x h x a)         mm         1285         1285         1285           Machine dimensions (l x h x a)         mm         1189         1189         1189           Squeegee width         mm         785           Machine weight empty without batteries         kg         165         173         172           Machine weight empty with batteries         kg         243         251         250           GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70			i i i i i i i i i i i i i i i i i i i				
Traction motor         V/W         (1) 24/300           SPECIFICATIONS           Machine dimensions (I x h x a)         mm         1285 1285 1285 1285 1189 1189 1189 1189 1189 641           Squeegee width         mm         709 641           Machine weight empty without batteries         kg         165 173 172           Machine weight empty with batteries         kg         243 251 250           GVW (Gross Vehicle Weight)         kg         382 390 389           Sound level (ISO 11201)         dB (A)         <70							
Machine dimensions (l x h x a)     mm     1285     1285     1285       Machine dimensions (l x h x a)     1189     1189     1189       5queegee width     mm     785       Machine weight empty without batteries     kg     165     173     172       Machine weight empty with batteries     kg     243     251     250       GVW (Gross Vehicle Weight)     kg     382     390     389       Sound level (ISO 11201)     dB (A)     <70	, , , , , , ,						
Machine dimensions (l x h x a)     mm     1285     1285     1285       Machine dimensions (l x h x a)     1189     1189     1189       5queegee width     mm     785       Machine weight empty without batteries     kg     165     173     172       Machine weight empty with batteries     kg     243     251     250       GVW (Gross Vehicle Weight)     kg     382     390     389       Sound level (ISO 11201)     dB (A)     <70	CDECIFICATIONS						
Machine dimensions (l x h x a)     mm     1189     1189     1189       Squeegee width     mm     785       Machine weight empty without batteries     kg     165     173     172       Machine weight empty with batteries     kg     243     251     250       GVW (Gross Vehicle Weight)     kg     382     390     389       Sound level (ISO 11201)     dB (A)     <70	SPECIFICATIONS		1005	4005	4005		
641     709     641       Squeegee width     mm     785       Machine weight empty without batteries     kg     165     173     172       Machine weight empty with batteries     kg     243     251     250       GVW (Gross Vehicle Weight)     kg     382     390     389       Sound level (ISO 11201)     dB (A)     <70	Machina dimensions (Ly. h.y.a)	200 200					
Machine weight empty without batteries         kg         165         173         172           Machine weight empty with batteries         kg         243         251         250           GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70	Wachine difficulties (LX II X a)	mm					
Machine weight empty without batteries         kg         165         173         172           Machine weight empty with batteries         kg         243         251         250           GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70	Squeegee width	mm					
Machine weight empty with batteries         kg         243         251         250           GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70			165		172		
GVW (Gross Vehicle Weight)         kg         382         390         389           Sound level (ISO 11201)         dB (A)         <70	3 1 1						
Sound level (ISO 11201) dB (A) <70							
			<70				
			1825				

<sup>\*</sup>Run times are based on continuous scrubbing run times



Your best investment in cleaning

The service package that gives you more of what you need for less than you think! We want you to deal only with your work, leave everything else to Fimap Life!

## FIMAP INTELLIGENCE



Using powerful software, unique of its kind, and on-site advice, Fimap supports you in choosing the ideal model and its optimum configuration, according to the type of environment to be cleaned and your requirements.

## € FIMAP FINANCE



Fimap offers various financial solutions that can be adapted perfectly to your business.

## FIMAP MAINTENANCE



With Fimap Maintenance you will not have to worry about maintenance of the product: your Fimap machines will always be as new and ready for use. Choose from the three Service Packs offered - Light, Smart or Full - to suit the needs of your job.

## A FIMAP FLEET MANAGEMENT



An online software collects the data sent by the machines and transforms it into valuable information that will help you dramatically improve the quality of the service offered. In this way you can optimize the use of your fleet taking into account the actual availability and eliminate wasted time.

## FIMAP NETWORK



Fimap is always there for you: our global network of certified dealers guarantees a rapid response support service, wherever you are.

## FIMAP ACADEMY



In a market that is becoming more and more competitive, Fimap offers a new support service for cleaning contractors, a growth opportunity for the professionals of today and tomorrow. This dedicated training program addresses various subjects that are relevant for the daily requirements of customers.

#### CERTIFICATIONS







For any additional information or for a demo please contact your usual Fimap dealer



FIMAP spa - Via Invalidi del Lavoro, 1 - 37059 S. Maria di Zevio - Verona - Italy Tel. +39 045 6060411 - Fax +39 045 6060417 - E-mail: fimap@fimap.com















Scan the QR Code with your Smart Phone and visit our web-site